






**Hali-Brite®**

**Hali-Brite® L810  
Solar  
Quick Install Guide**



SCAN QR CODE  
FOR FULL  
INSTRUCTION  
MANUAL AND  
WARRANTY

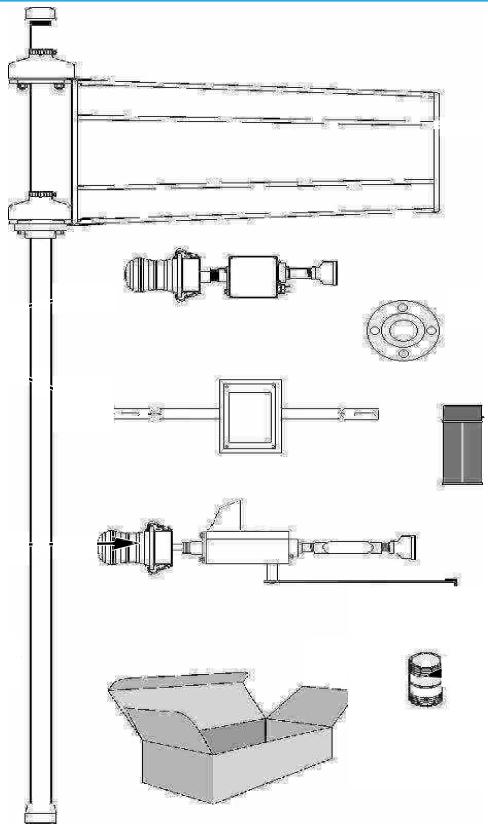

1. Remove contents from package and inspect.

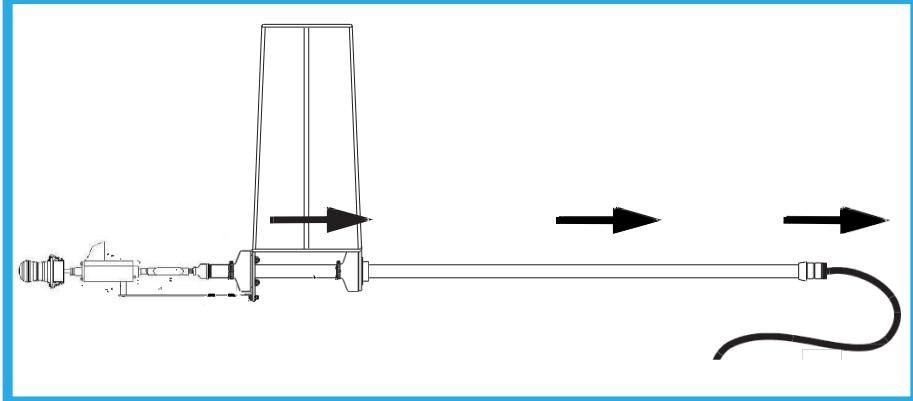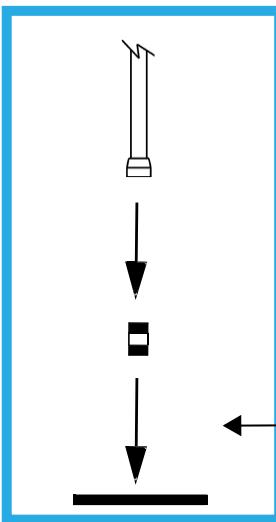

2. Push the wire cable through the basket support pipe and down the pole, out through the bottom
3. Tighten the light kit onto the support pipe, using a wrench. Tighten until 2/3 of the threads are engaged

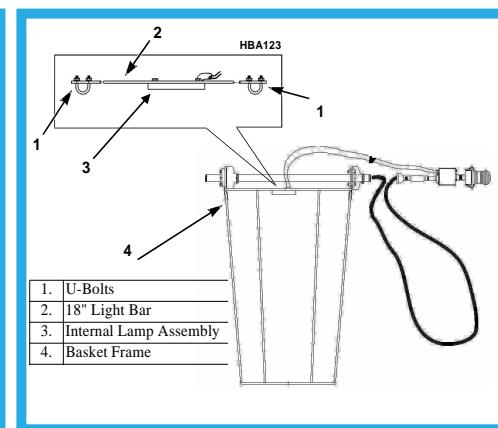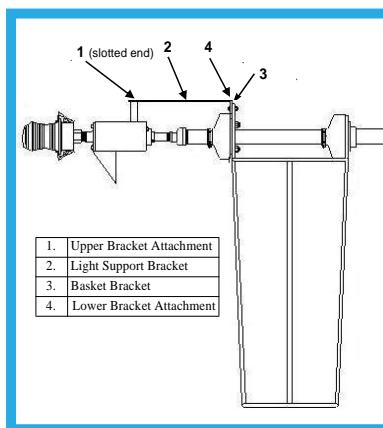


4. For external light kits, secure the Light Support bracket to the upper bracket and lower bracket attachments

5. For internal light kits, secure the light bar across the basket, and secure the lamp assembly to the light bar

6. Install the wind sock onto the basket using supplied zip ties. Install sock so drain eyelets are down

7. Thread the frangible coupling into the pole, then the pole onto the base can, floor flange, room mount or wall mount (sold separately)

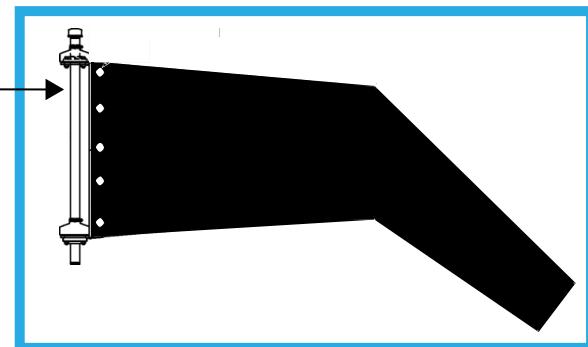

**Sales and Technical Support:**

1.800.553.6269  
Sales@halibrite.com

Hali-Brite, Inc.  
1119 Madison Street  
Brainerd, MN 56401

[www.halibrite.com](http://www.halibrite.com)  
 Ph: 218.454.0956  
 Fax: 218.454.0972